


MPU0878K

Magnetic Pickup

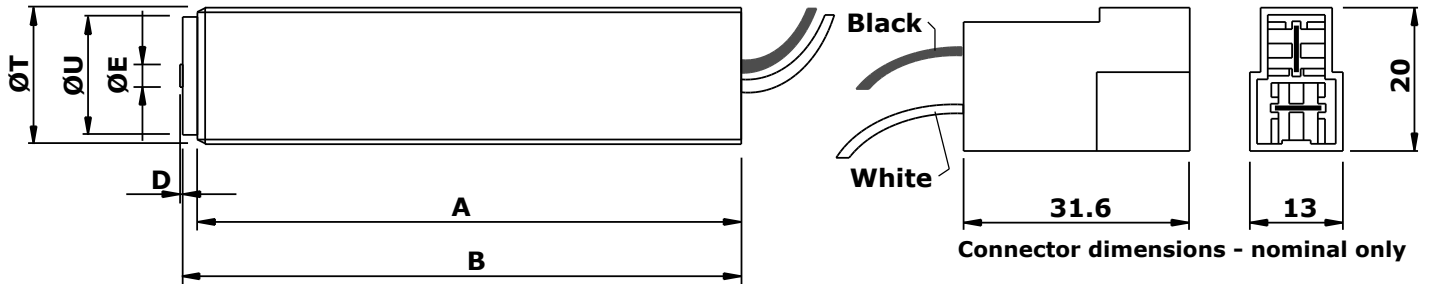

Mechanical specification

dimensions in mm unless otherwise stated

<i>Dimension</i>		<i>Part number</i>
A	76	
B	78	
D	0.4 nominal	
ØE	Ø3.17 Pole Piece	
ØT	¾" x 16 tpi UNF-2A	MPU0878K-I
or	M18 x 1.5 6g	MPU0878K-M
ØU	Ø16.8	
Main body material	Stainless steel	
End Bobbin face	Nylon 66 or Polypropylene (colour coded – black for UNF thread, white for Metric thread)	
Locknut	1 off supplied as standard	

Electrical specification

Resistance 2600Ω nominal @ 20°C

Inductance

Operating temperature range -20°C to +120°C

Voltage output

Minimum speed

Termination Epoxy sealed body exit with 2 x FLT 19/0.25 (1mm²) x 75mm long flexlite flying leads fitted with AMP Faston 2-way Tab (0.25") Housing 180908-0 (type F)

Mating connector AMP 2-way Receptacle 180907-0 (type D)

For the full data sheet and/or a quotation please contact us: sales@logitechelectronics.com

MADE IN THE UK

Reliability, Guaranteed



Logitech Electronics Limited

e: sales@logitechelectronics.com
t: +44 (0)1952 820444

Design and Manufacture of Electronic Systems and Instrumentation. Supply of Sensors and Transducers
www.logitechelectronics.com

Lane End | Church Aston | Newport | Shropshire | TF10 9JJ | UK