


Plug and Socket Type
Higher Output
Speed Sensor

MPU36127H Magnetic Pickup

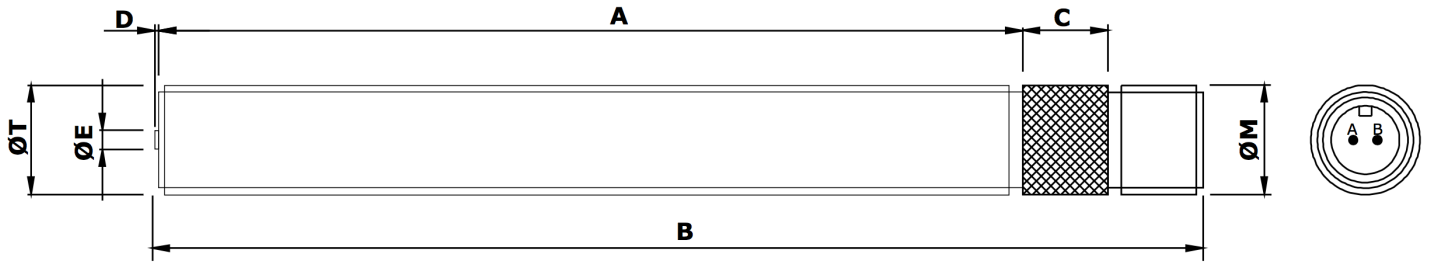

Mechanical specification

dimensions in mm unless otherwise stated

| <i>Dimension</i> | | <i>Part number</i> |
|---------------------------|---|--------------------|
| A | 127 | |
| B | 154 nominal | |
| C | 12 medium diamond knurl | |
| D | 0.6 | |
| ØE | Ø2.7 Pole Piece | |
| ØM | 5/8" x 24 tpi UNEF-2A (connector thread) | |
| ØT | 5/8" x 18 tpi UNF-2A (body thread) | MPU36127H-I |
| or | M16 x 1.5 6g | MPU36127H-M |
| Main body material | Stainless Steel | |
| End Bobbin face | Polypropylene | |
| Locknut | 1 off supplied as standard | |

Electrical specification

Resistance 1000 Ω nominal @ 20°C

Inductance

Operating temperature range -20°C to +120°C

Voltage output

Polarity Pin B positive as target approaches

Minimum speed

Termination MS (screw) 10SL4P (2-pin integral plug)

Mating connector MS (screw) 10SL4S (2-pin line socket)

For the full data sheet and/or a quotation please contact us: sales@logitechelectronics.com

MADE IN THE UK

Reliability, Guaranteed



Logitech Electronics Limited

e: sales@logitechelectronics.com

t: +44 (0)1952 820444

Design and Manufacture of Electronic Systems and Instrumentation. Supply of Sensors and Transducers
www.logitechelectronics.com

Lane End | Church Aston | Newport | Shropshire | TF10 9JJ | UK