


# MPU3675 Magnetic Pickup

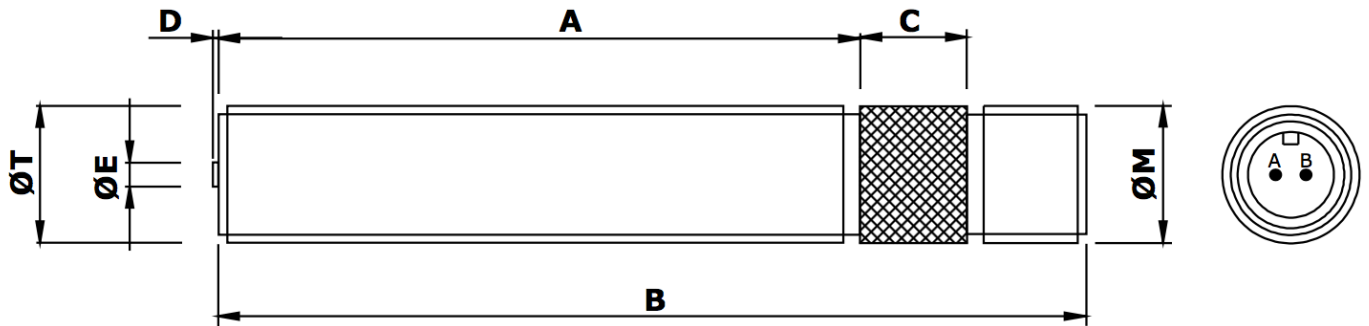

## Mechanical specification

dimensions in mm unless otherwise stated

<i>Dimension</i>		<i>Part number</i>
<b>A</b>	75	
<b>B</b>	102	
<b>C</b>	12 medium diamond knurl	
<b>D</b>	0.6 nominal	
<b>ØE</b>	Ø2.8 Pole Piece	
<b>ØM</b>	5/8" x 24 tpi UNEF-2A (connector thread)	
<b>ØT</b>	5/8" x 18 tpi UNF-2A (body thread)	<b>MPU3675-I</b>
<b>or</b>	M16 x 1.5 6g	<b>MPU3675-M</b>
<b>Main body material</b>	Stainless Steel	
<b>End Bobbin face</b>	Polypropylene	
<b>Locknut</b>	1 off supplied as standard	

## Electrical specification

**Resistance** 250 ohms nominal @ 20°C

**Inductance**

**Operating temperature range** -54°C to + 120°C

**Voltage output**

**Minimum speed**

**Termination** MS screw 10SL-4P (2-way integral plug)

**Mating connector** MS screw 10SL-4S (2-way line socket)

For the full data sheet and/or a quotation please contact us: [sales@logitechelectronics.com](mailto:sales@logitechelectronics.com)

MADE IN THE UK

*Reliability, Guaranteed*



**Logitech Electronics Limited**

e: [sales@logitechelectronics.com](mailto:sales@logitechelectronics.com)

t: +44 (0)1952 820444

*Design and Manufacture of Electronic Systems and Instrumentation. Supply of Sensors and Transducers*  
[www.logitechelectronics.com](http://www.logitechelectronics.com)

Lane End | Church Aston | Newport | Shropshire | TF10 9JJ | UK