

Introduction

The MPEXS4250S magnetic pickup speed sensors provide an output signal when a ferrous target passes the tip of the sensor. For uniformly spaced targets such as gear teeth or turbine blades the output waveform is typically sinusoidal. The frequency of the output signal is proportional to the rotation speed of the target. The magnetic pickup is a passive device and does not require a power supply.

Selection

The MPEXS4250S magnetic pickup may be used in zones 0, 1, or 2 with flammable gases.

The magnetic pickup (MPU) may be used in the presence of flammable gases and vapours with apparatus groups IIC or IIB or IIA and with temperature classes T1 or T2 or T3 or T4 or T5 or T6 with ambient temperature ranges as defined in the certificate and listed on page 4 of this guide.

Installation

The magnetic pickup is to be installed by suitably trained personnel in accordance with the applicable code of practice (typically EN 60079-14). The pickup must be connected via an ATEX / IECEx (as appropriate) certified Ex ia barrier with output not exceeding the parameters specified on the certificate and listed on page 4 of this guide. Typical connection arrangements are shown in figure 1.

MPEXS4250S is terminated with an MS10SL-4P connector. We recommend that the mating 10SL-4S connector is fitted with 2-core screened cable to connect to the control/monitoring instrumentation. It is advisable to route the cable away from possible sources of interference such as power cables and relays.

The output of the magnetic pickup is clamped to a nominal 4V peak, 4.97V maximum..

Under certain extreme circumstances, the non-metallic parts incorporated in the enclosure of this equipment may generate an ignition-capable level of electrostatic charge. Therefore, particularly in the event of an installation in zone 0, the equipment shall not be installed in a location where the external conditions are conducive to the build-up of electrostatic charge on such surfaces. Additionally the equipment shall only be cleaned with a damp cloth.

MPEXS4250S has a sealed sensing face, suitable for permanent immersion in fluid.

If the magnetic pickup is likely to be subjected to harsh external effects or to come into contact with aggressive substances, e.g. acidic liquids or gases that may attack metals or solvents that may affect polymeric materials, then it is the responsibility of the user to take suitable precautions that prevent it from being adversely affected, thus ensuring that the type of protection is not compromised. If unsure, please contact our sales office to discuss the suitability of the magnetic pickup for the application.

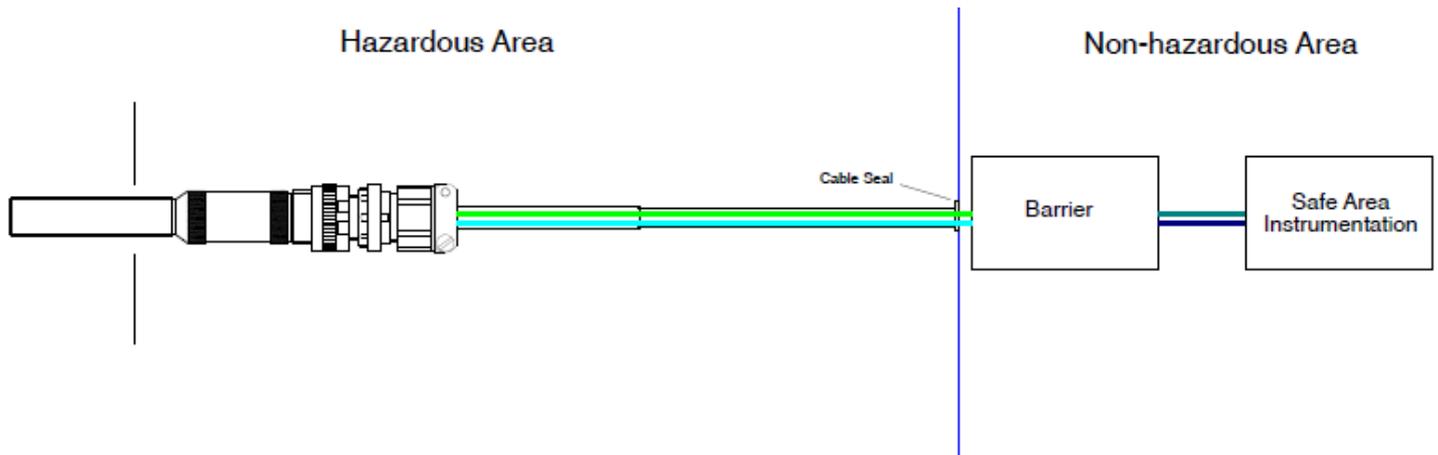


Figure 1: Typical connection arrangements

Servicing

Regular periodic inspection of the equipment should be performed by suitably trained personnel in accordance with the applicable code of practice to ensure it is maintained in a satisfactory condition.


The magnetic pickup contains no serviceable parts. Should the MPU fail a replacement can be ordered from Logitech Electronics Limited or authorised distributor.

To remove the MPU, disconnect the MS10SL-4S connector, loosen the locknut and unscrew the MPU from the housing.

Intrinsically Safe

Plug and Socket Type
Speed Sensor

MPEXS4250S Magnetic Pickup

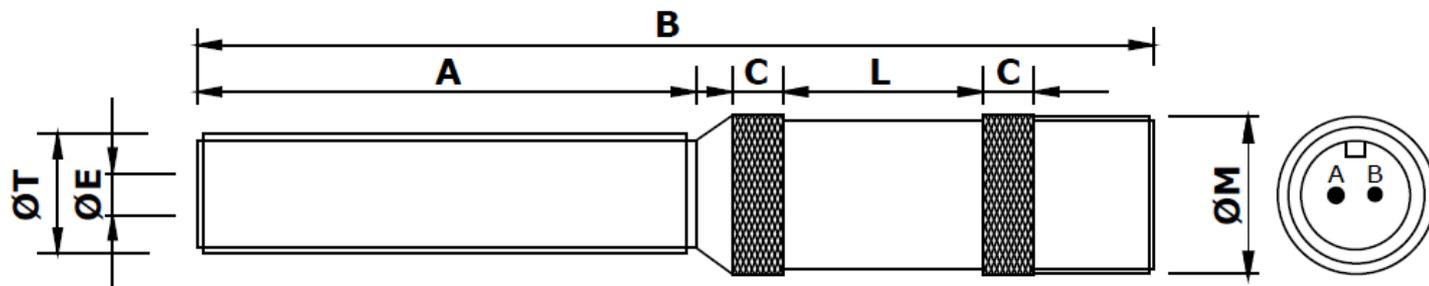

Mechanical specification

dimensions in mm unless otherwise stated

<i>Dimension</i>		<i>Part number</i>
A	50	
B	97 nominal	
C	5 medium diamond knurl	
L	20 plain area for affixing label	
ØE	Internal 4.2 pole piece	
ØM	5/8" x 24 tpi UNEF-2A (connector thread)	
ØT	1/2" x 20tpi UNF-2A	MPEXS4250S-I
or	M12 x 1.0 6g	MPEXS4250S-M
Main body material	Stainless Steel	
End Bobbin face	Solid sealed sensing face, suitable for permanent liquid immersion	
Locknut	1 off as standard	

Electrical specification

Resistance 1070Ω nominal @ 20°C

Inductance 260mH nominal

Operating temperature range -40°C to + 120°C (see note 2)

Voltage output Clamped at 4V peak nominal, 4.97V maximum

Minimum speed 16mm/second (see note 1)

Polarity Pin A negative with respect to Pin B as target approaches

Termination MS (screw) 10SL4P (2-pin integral plug)

Mating connector MS (screw) 10SL4S (2-pin line socket)

Notes:

1. Minimum speed in mm/second to generate 100mV peak to peak typical output measured across a 10K load using a 60 tooth mild steel gear wheel of Ø6", rotating at 1000 rpm and with an air gap setting of 0.01".
2. The permitted ambient temperature range is dependent on temperature class, refer to T_a.
3. Complies with the Dielectric Strength requirements of EN60079-11, Section 10.3.

Entity parameters

U, I and P for the selected barrier must not exceed the values below:

U _i (V)	I _i (mA)	P _i (W)	C _i (nF)	L _i (μH)
30	160	0.75	0	0

Ambient Temperature T_a

The equipment is certified for use in ambient temperatures in the range of -40°C to +120°C and should not be used outside this range. The range is restricted according to temperature class as follows:

T6	T5	T4	T3
-40°C to +49°C	-40°C to +64°C	-40°C to +99°C	-40°C to +120°C

Applicable Special Conditions

None applicable.

Approval

Ex ia IIC T6...T3 Ga

Baseefa19ATEX0151X

IECEX BAS 20.0002X

MPEXS Series

Logitech Electronics Limited
Lane End
Church Aston
Newport
Shropshire
TF10 9JJ
UK



Certificates and user guides are available to view and download from our website:
www.logitechelectronics.com/ex/download

MADE IN THE UK

Reliability, Guaranteed



Logitech Electronics Limited

e: sales@logitechelectronics.com
t: +44 (0)1952 820444

Design and Manufacture of Electronic Systems and Instrumentation. Supply of Sensors and Transducers
www.logitechelectronics.com

Lane End | Church Aston | Newport | Shropshire | TF10 9JJ | UK